






20 Garrett Street ap&w in association with SKYLON

Refurbishment

18,000ft²

Commerical

£2,300,000

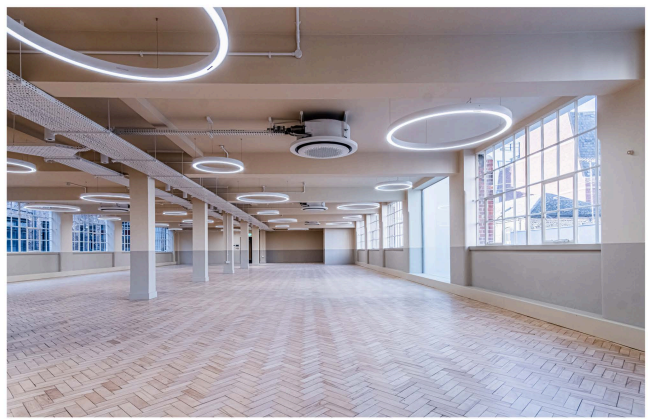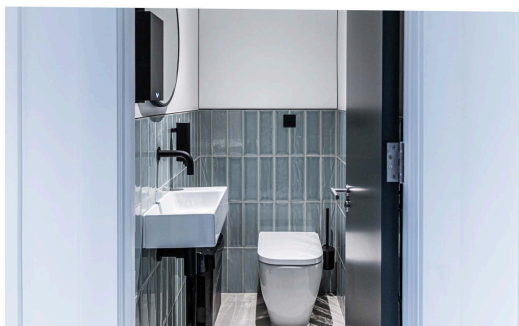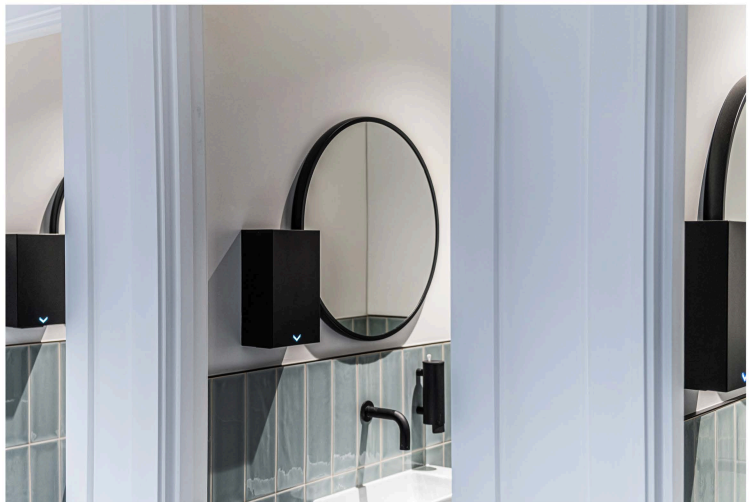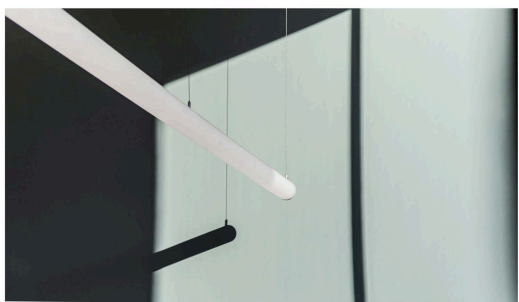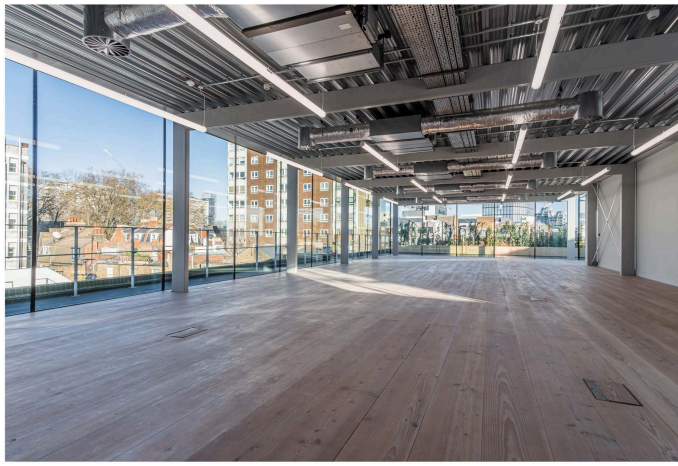

20 Garrett Street

THE OVERVIEW

20 Garrett Street is a commercial refurbishment of a former warehouse building to arrange 18,128ft² of considered Grade A office accommodation and a 1,486ft² roof terrace. The project value was £2,300,000. In the 10 months of work, the scope included: exposed steel columns, energy efficient lighting, new bike storage facilities, reception area and 15 new WC and shower facilities including 3 disabled bathrooms in compliance with DDA standards. The architecturally designed building has features which have been retained and optimised to minimise embodied carbon and building waste through construction. Practical completion for this project was issued in December 2022.

THE PERSONNEL

The project had a large construction team of trusted trade professionals with at most 20 workers on site simultaneously. The workforce was managed by site manager Karol Gburczyk and coordinated by project director Piotr Tarasek and Health & Safety coordinator Izabela Tarasek. CVs of key personnel can be found in the attached appendix.

THE CHALLENGES

The initial Garrett Street tender pack included a design for central unit ventilation for 12 WCs, 2 showers and 3 disabled toilets. It was noticed by our internal M&E engineer that the central unit's fan may not be of adequate size to accommodate such a large ventilation area. To make sure the plant is meeting the requirements we had our engineer recalculate the design. The calculations showed the fan would be working on 95% power constantly. This was pointed out to the client's M&E consultant, who advised this was done to cut costs on a bigger fan coil unit. The client was made aware this is a short term solution as the fan will likely need replacement in the near future. The design was then recalculated by our M&E designer to accommodate a large enough unit to work at 80% power as recommended by the manufacturer. The M&E design at this tender stage was also missing automatic fire dampers on ventilation, which is a building control requirements. As a principle contractor, we always check the design and consult with our internal designers to be sure that the design meets all standards and is within budget.

THE SUCCESS AND IMPROVEMENTS

The refurbishment of 20 Garrett Street contributed to the preservation of the industrial characteristic of the area. It is a building of exceptional value to the surrounding region due to its rich history dating back to 1920s. Some essential features to accomplish the desired finish was exposing of the steelworks and renovation of the crittall windows. Thanks to our in-house joinery we were also able to provide bespoke solutions to the reception area and terrace to create a state-of-the-art facility.